


Cutting new generation.

Professional solutions.



Main features

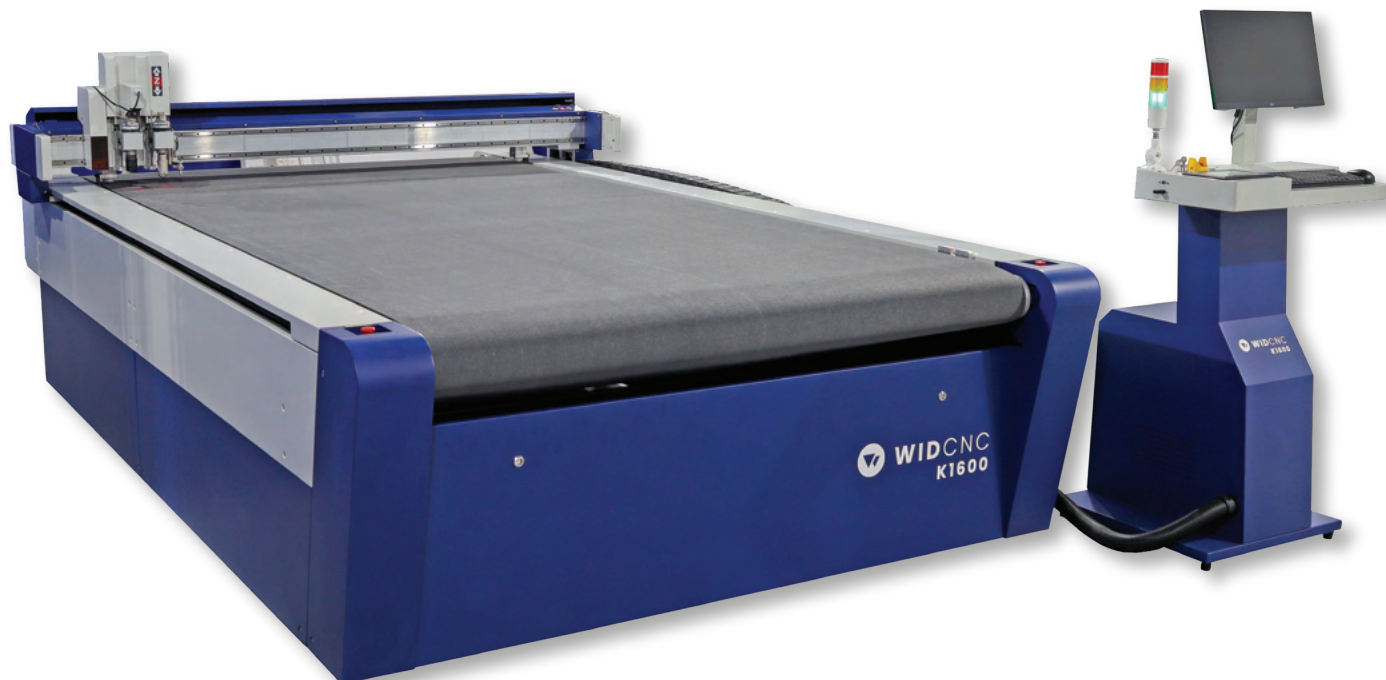

Dimensions (W x L x H)

3482 x 3652 x 1597 mm

Weight (KG)

1000 kg

Power Supply

Machine: 230V 50/60HZ <4000w (15A)

Vacuum: 380v 50/60hz 7500W (18A)

Speed Travel

Up to 180m/min.

- Working area: 1600 x 2500mm
- Servo motors
- High precision linear guides
- BeDi industrial transmission system (Germany)
- Positioning accuracy: 0.1mm
- Automatic feeding system, with 4 mm felt belt, with high resistance and friction
- Roll feeding system
- Aluminum vacuum table with 4 independent and automatic areas
- 7.5kw side channel vacuum pump
- Interchangeable double tool holder system
- Drag knife tool
- High frequency vibrating knife tool
- Ballpoint pen tool
- Laser pointer and high precision camera registration system
- High precision tool gauge
- Infrared and contact security system
- Control and configuration system with PC included

Options

- Third tool holder
- KissCut knife tool
- Bevel knife tool (0° - 15° - 22,5° - 30° - 45°)
- Crease tool
- Disc knife tool
- Two 2.2kW vacuum pumps - 230V 50/60HZ

